


# 10143

## Electric Release

- Operating voltage 12Vdc
- Stainless Steel
- Fail-Secure (*Power to Unlock*)
- ANSI style release (*Budget*)



STAINLESS  
STEEL

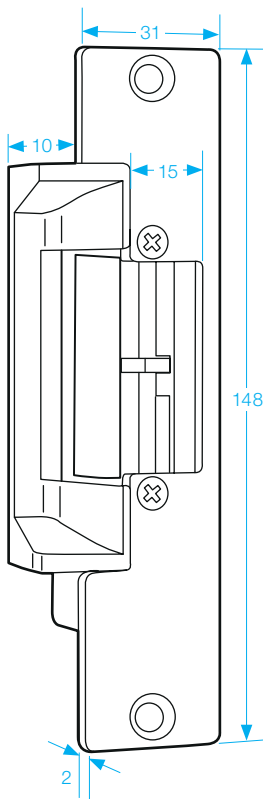

### SPECIFICATION

- Voltage tolerance:  $\pm 10\%$ .
- Current draw: 200mA (at temperature 20°C).
- Operating temperature: -10~45°C (14 to 131°F).
- Lock's surface temperature: Current temperature  $\pm 20\%$  (when power is on).
- Bolt status output indicates bolt locked or unlocked status. (SPDT rated 3A at 30Vdc).
- Humidity: 0~95% non-condensing.
- Tested to 5000,000 cycles
- Horizontal or vertical installation.
- Weight: 1.2kg (approx).