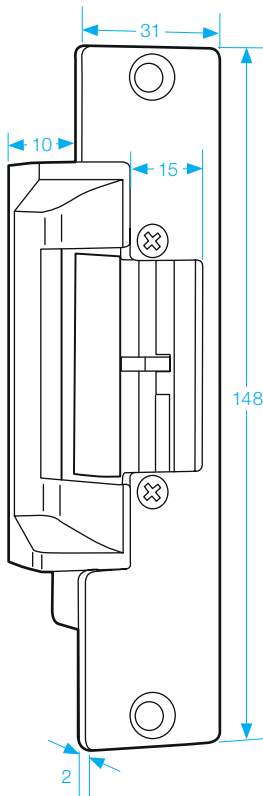


10143 FAIL SECURE**10145** FAIL SAFE**Electric Release**

- Operating voltage 12Vdc
- Stainless Steel
- Fail-Safe (*Power to Lock*)
- Fail-Secure (*Power to Unlock*)
- ANSI style release (*Budget*)

STAINLESS
STEEL**SPECIFICATION**

- Voltage tolerance: $\pm 10\%$.
- Current draw: 200mA (*at temperature 20°C*).
- Operating temperature: $-10\sim 45^{\circ}\text{C}$ (*14 to 131°F*).
- Lock's surface temperature: Current temperature $\pm 20\%$ (*when power is on*).
- Bolt status output indicates bolt locked or unlocked status. (*SPDT rated 3A at 30Vdc*).
- Humidity: 0~95% non-condensing.
- Tested to 5000,000 cycles
- Horizontal or vertical installation.
- Weight: 1.2kg (*approx*).