



SPLIT II

Standalone Proximity


- Operating voltage 12 or 24Vac/Vdc
- 2000 users relay 1
- 100 users relay 2
- Infra-red programmer
- Reads EM, Mifare and HID cards
- IMPORTANT: Cards for relay 1 do not work on relay 2



INFRA-RED

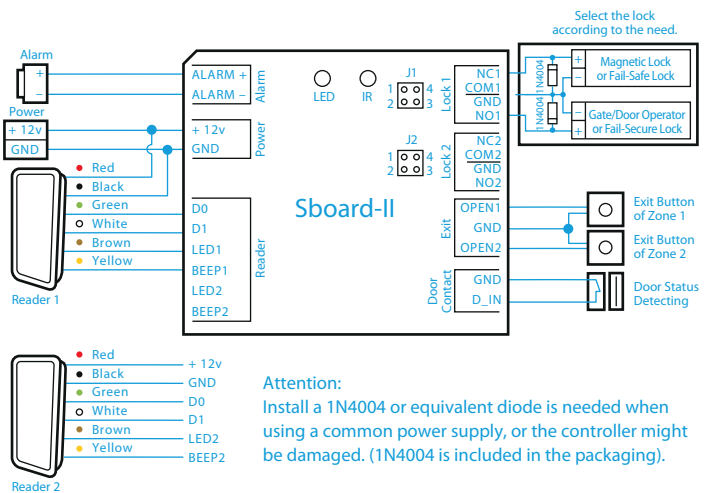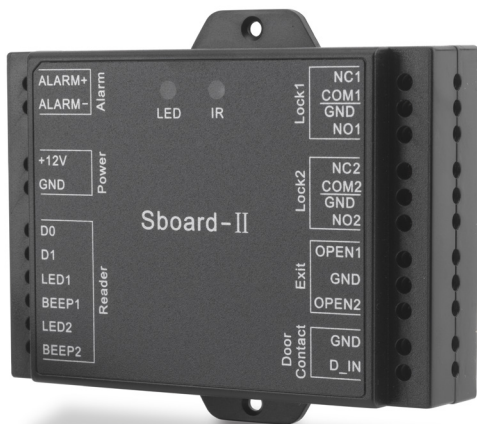

WHEN USING NO/NC/COM DRY CONTACT OUTPUT



1. Remove the Pin Caps on points 1, 2, 3 and 4 (Remark: J1 (Relay 1) & J@ (Relay2), please check the relay you are using).
2. Insert one of the Pin Caps on point 1 and point 4.
3. Fix the back cover and keep the other Pin Cap well.

PRODUCT	DESCRIPTION
SPLIT II-M	Split Controller with Mullion Reader
SPLIT II-M-2	Split Controller with 2 x Mullion Reader
SPLIT II-W	Split Controller with wall Reader
SBOARD II	Controller Only
MR-900	Mullion Multi-Tech Reader
EM-901	Wall Mount EM Reader