

U10006S

Monitored Midi Magnet



- Stainless Steel housing
- Operating voltage 12~24Vdc (Selectable)
- Holding force up to 800lbs (363Kg)
- Sealed electronics
- Weather resistant - IP67
- Monitored



WEATHER
RESISTANT
- IP 67 -



STAINLESS
STEEL

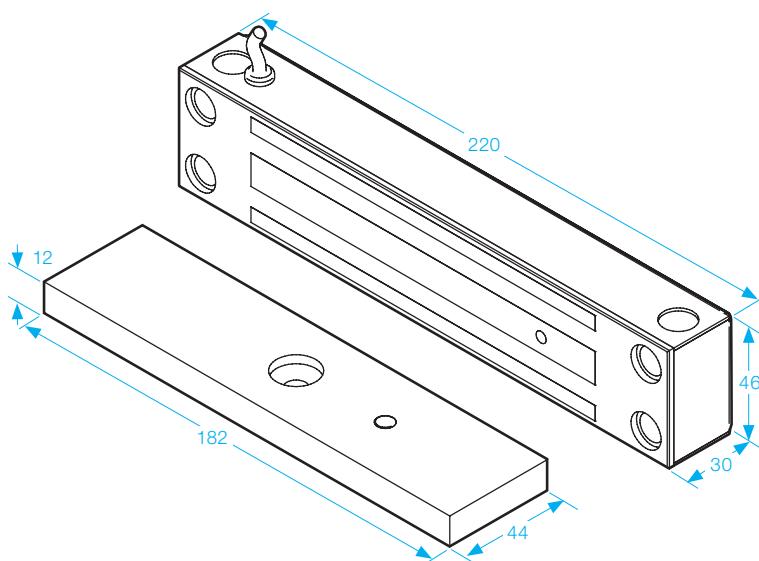

Reed Sensor Contact

Grey — N.C.
Blue — N.O.
Pink — Com.

CAUTION
Before applying power set wiring correctly.

SPECIFICATION

- Voltage tolerance: $\pm 10\%$.
- Current draw: 460mA at 12Vdc, 230mA at 24Vdc (at temperature 20°C).
- Operating temperature: -10~55°C (14 to 131°F).
- Lock's surface temperature: Current temperature $\pm 20\%$ (when power is on).
- Magnetic bond sensor monitor output remotely monitors the door lock or unlock status. (N.C. Output-Door opened; N.O. Output-door closed) (SPDT rated 0.25A at 12Vdc).
- Humidity: 0~95% non-condensing.
- Weight: 2.9kg (approx).