
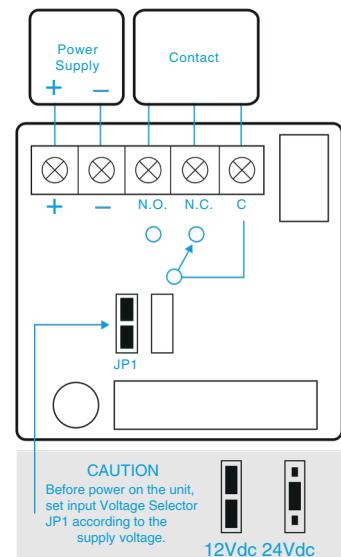


# A-10020-BLK

## Monitored Standard Magnet in Black

- Operating voltage 12~24Vdc (Selectable)
- Aluminium housing
- Holding force up to 1200lbs (544Kg)
- Electro-less nickel plated armature
- Architectural Black Finish
- Status LED ● Red ● Green

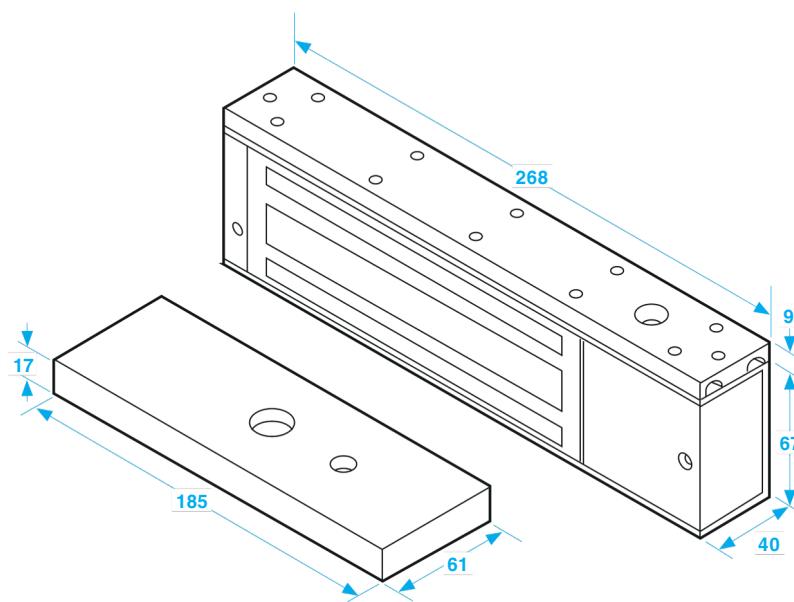

### SPECIFICATION

- Voltage tolerance:  $\pm 10\%$ .
- Current draw: 420mA at 12Vdc, 210mA at 24Vdc (at temperature  $20^\circ\text{C}$ ).
- Operating temperature:  $-10\text{~}\sim 55^\circ\text{C}$  (14 to  $131^\circ\text{F}$ ).
- Lock's surface temperature: Current temperature  $\pm 20\%$  (when power is on).
- Humidity: 0~95% non-condensing.
- Aluminium housing, nickel plated armature.
- Weight: 4.71kg (approx).