

A-500M


Mortice Monitored Standard Magnet

- Operating voltage 12~24Vdc (*Selectable*)
- Stainless Steel housing
- Holding force up to 1200lbs (*544Kg*)
- Electro-less nickel plated armature





OPTIONS

500BP



U520S

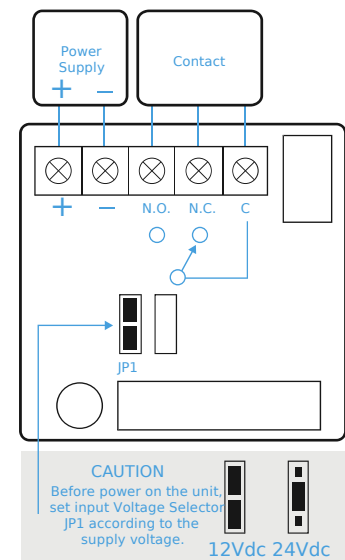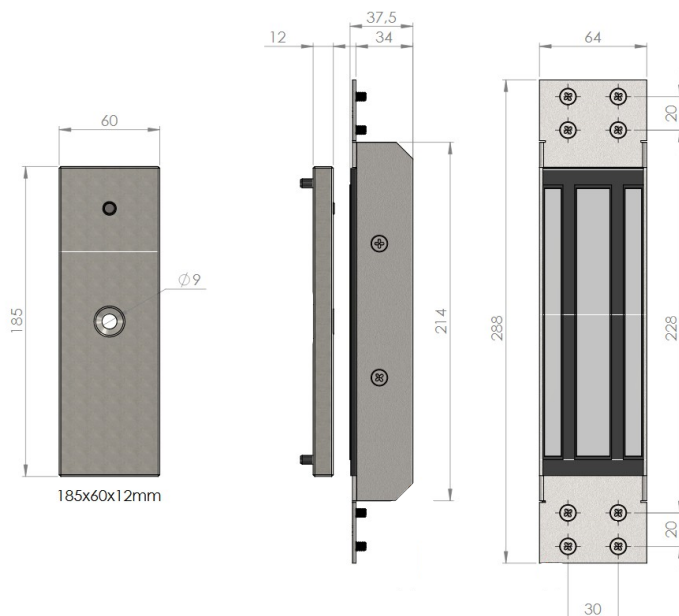

SPECIFICATION

- Voltage tolerance: $\pm 10\%$.
- Current draw: 420mA at 12Vdc, 210mA at 24Vdc (at temperature 20°C)
- Operating temperature: -10~55°C (14 to 131°F)
- Lock's surface temperature: Current temperature $\pm 20\%$ (when power is on).
- Magnetic bond sensor monitor output remotely monitors the door lock or unlock status. (N.C. Output-Door opened; N.O. Output-door closed) (SPDT rated 0.25A at 12Vdc)
- Humidity: 0~95% non-condensing.
- Weight: 4.71kg (*approx.*).