




Package 11P Escape (EN1125)

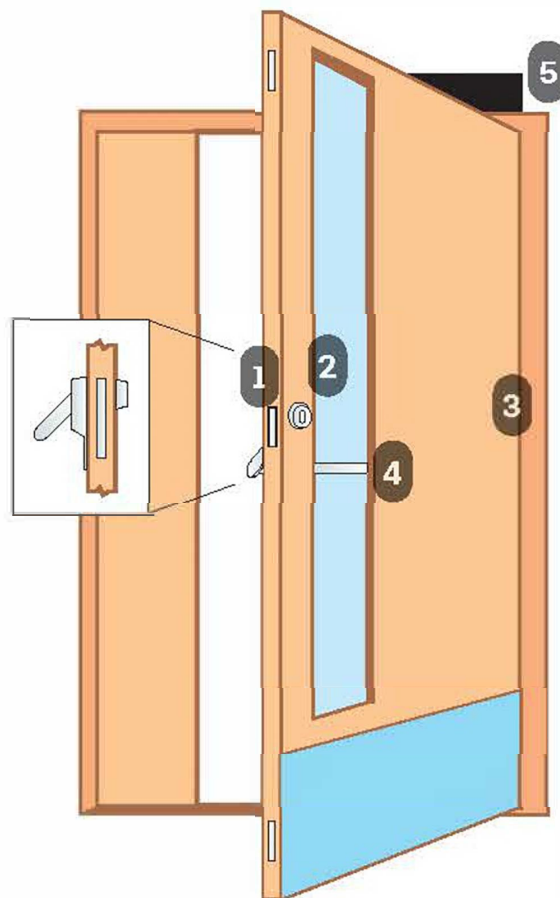

Standard door

Read in, free egress (motor lock) – complies with EN1125

1. PE590 motor lock
2. CY037 outside cylinder – Scandinavian
3. EA280 concealed door loop
4. PBE002 Abloy panic bar
5. DC240 door closer (optional)

ORDERING CODE

ABLOY-PE580-50-PACK11P

High security wood or metal door applications with motor operated deadbolt and latch bolt, inside panic bar always operates. Key override at all times from outside.

Technical Specification:

Operating voltage: 12 V AC to 24 V DC stabilised (+15%–15%).

Current draw: 12 V DC 50 mA idle, norm 600 mA, max 1700 mA

24 V DC 23 mA idle, norm 250 mA, max 700 mA.

Backsets available: Standard 50 mm.

Monitoring: RQE on panic bar, bolt position, cyl.operation with additional part 950885.

Standards:

EN1125 when used with correct furniture
and functions

EN1634-1

EN61000-6-1

EN1303 (cylinder)

EN14846

