




Package 12E High Security

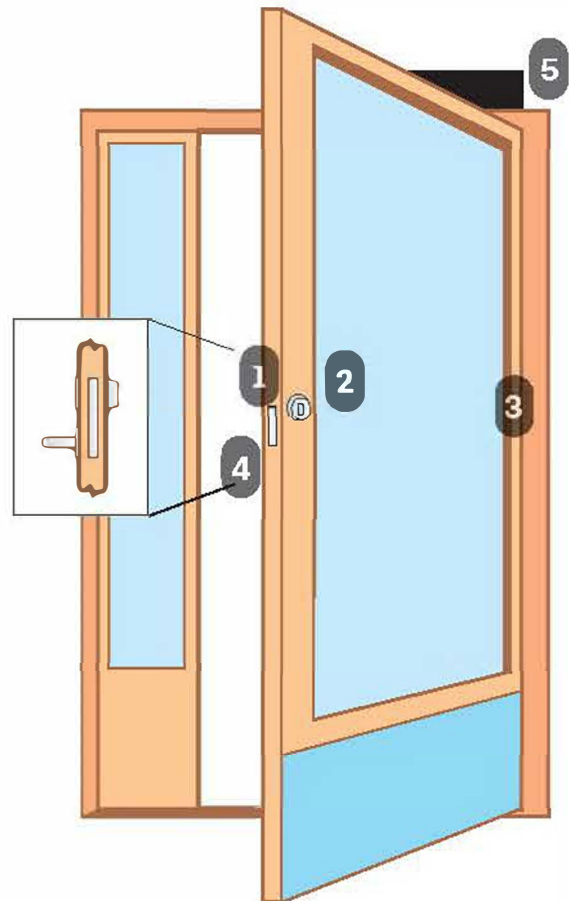

Narrow stile door

Read in, free egress (motor lock) – complies with EN179

1. EL490 motor lock
2. CY063 outside cylinder – Scandinavian
3. DL8 door loop
4. 3-20/O630 inside handle
5. DC240 door closer (optional)

ORDERING CODES

ABLOY-EL490-29-PACK12E

ABLOY-EL490-35-PACK12E

High security narrow stile door applications with motor operated deadbolt and latch bolt, inside handle always operates. Key override at all times from outside. Optional electrical handle control: if used negates EN179.

Technical Specification:

Operating voltage: 12 V AC to 24 V DC stabilised (+15%–15%).

Current draw: 12 V DC 50 mA idle, norm 600 mA, max 1700 mA

24 V DC 23 mA idle, norm 250 mA, max 700 mA.

Backset available: Standard 29 mm, 35 mm.

Monitoring: RQE on inside handle, bolt position, cyl. operation.

Standards:

EN179 when used with correct furniture
and functions

EN1634-1

EN61000-6-1

EN1303 (cylinder)

EN14846

