




Package 12P Escape (EN1125)

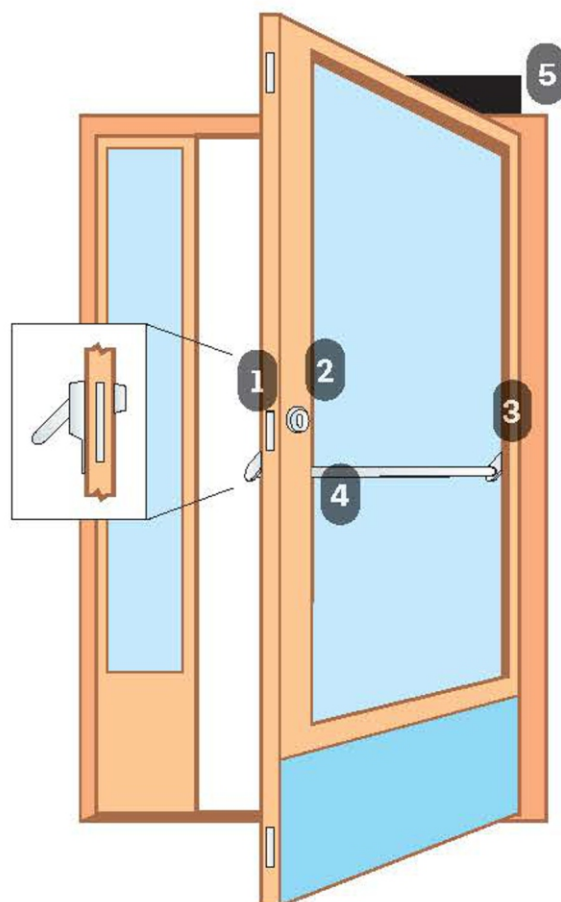

Narrow stile door

Read in, free egress (motor lock) – complies with EN1125

1. EL490 motor lock
2. CY063 outside cylinder – Scandinavian
3. DL8 door loop
4. PBE003 Abloy panic bar
5. DC240 door closer (optional)

ORDERING CODES

ABLOY-EL490-29-PACK12P

ABLOY-EL490-35-PACK12P

High security narrow stile door applications with motor operated deadbolt and latch bolt, inside panic bar always operates. Key override at all times from outside.

Technical Specification:

Operating voltage: 12 V_{AC} to 24 V_{DC} stabilised (+15%–15%).

Current draw: 12 V_{DC} 50 mA idle, norm 600 mA, max 1700 mA

24 V_{DC} 23 mA idle, norm 250 mA, max 700 mA.

Backset available: Standard 29 mm, 35 mm.

Monitoring: RQE on panic bar, bolt position, cyl. operation.

Standards:

EN1125 when used with correct furniture
and functions

EN1634-1

EN61000-6-1

EN1303 (cylinder)

EN14846

