




Package 14E High Security – Not for Fire Doors

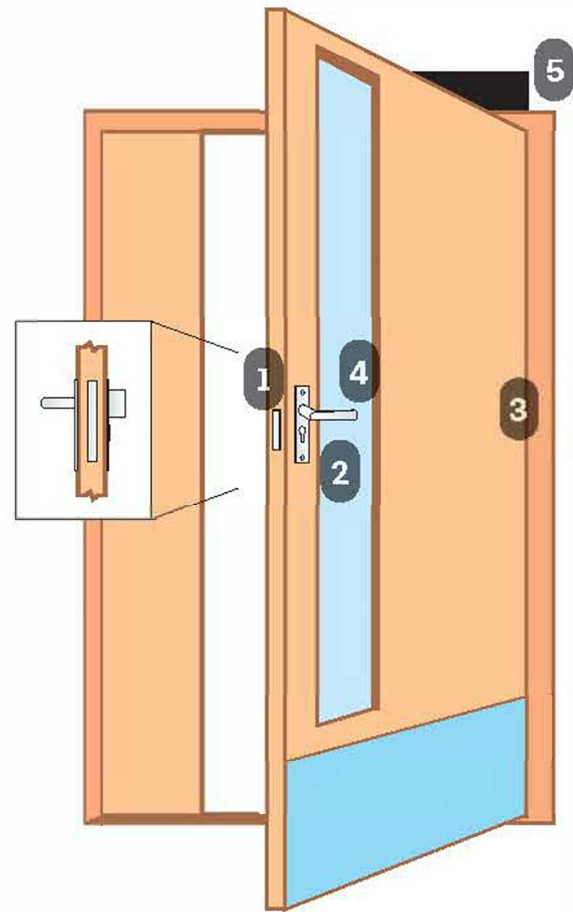

Standard door Read in, free egress (motor lock) – complies with EN179

1. EL518 motor lock
2. CY326 single cylinder – DIN Europrofile
3. EA280 concealed door loop
4. 319242/115PZ+BL handle
5. DC240 door closer (optional)

ORDERING CODES

ABLOY-EL518-55-PACK14E

ABLOY-EL518-60-PACK14E

ABLOY-EL518-65-PACK14E

Highsecurity wood or metal door applications with motor operated deadbolt and latch bolt, inside handle always operates. Key override at all times from outside.

Technical Specification:

Operating voltage: 12 V AC to 18 V AC, 12 V DC to 24 V DC (+15%–10%).

Current draw: 12 V DC 80 mA idle, norm 450 mA 24 V DC 40 mA idle, norm 220 mA.

Backsets available: Standard 65 mm, 55 mm, 60 mm.

Monitoring: Bolt position.

Standards:

EN179 when used with correct furniture

EN61000–6–1

EN1303 (cylinder)

EN14846

