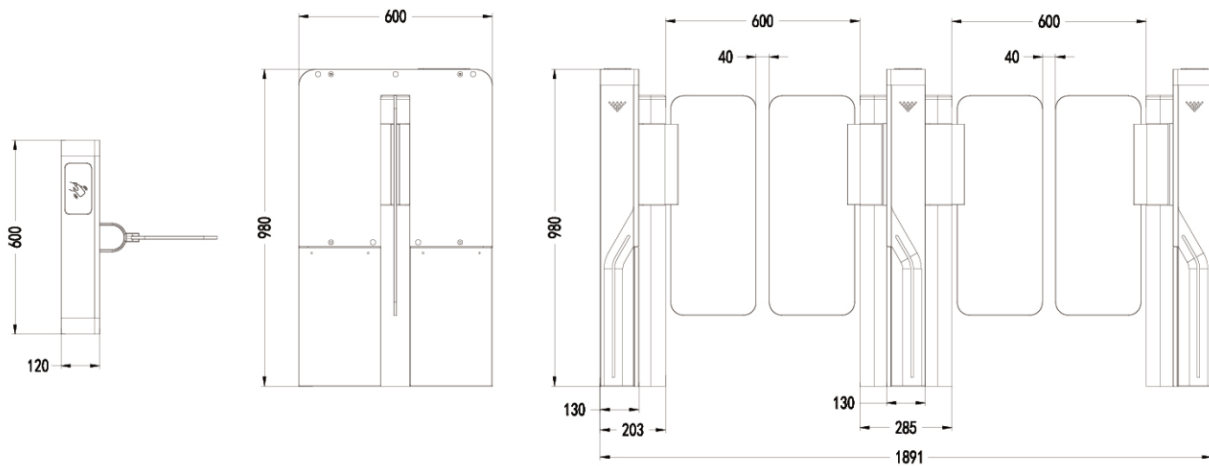®**Turboo**

EF3213 Product Show

two-channel

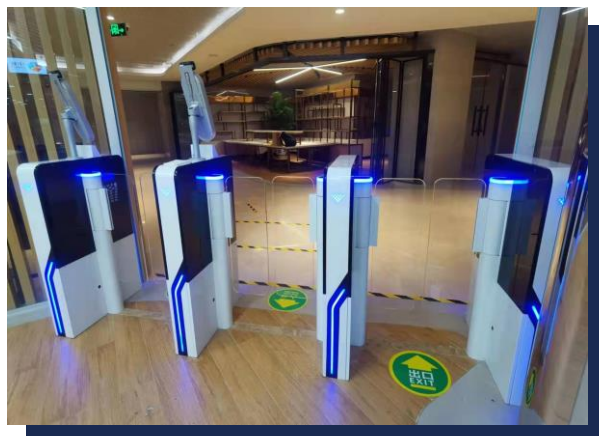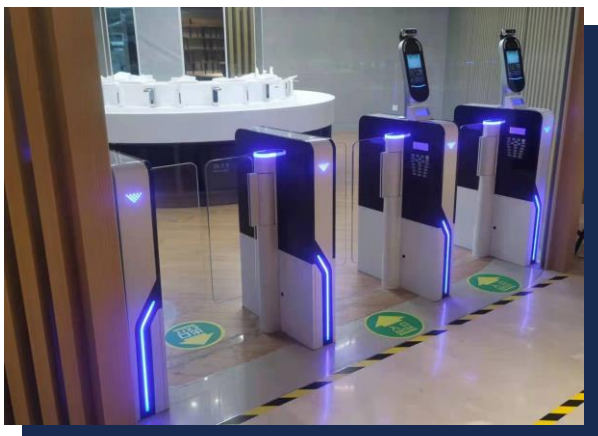Single channel

Product

Functions & Features

- 1、Reasonable and reliable design, low noise, smooth operation and long service life；

- 2、With function of opening doors automatically under power-off state to meet the need of fire-fighting passage；

- 3、With functions of anti-tail, anti-reverse pass and so on;

- 4、Card can be set "with memory" or "without memory" functions;

- 5、With automatic reset function, i.e. after having access to the gate, the gate automatically restores to the locked state if not pass within the time set;

- 6、With infrared anti-clip function (anti-clip when gate is open or running);

- 7、Compatible with IC, ID card, scanning and face recognition,etc.

- 8、Two modes of operation are available: open or closed.

- 9、Various working modes are available, including two-way card reading and one-way card reading,etc.

Parame-

Size （L*W*H)	630*130*980mm
Baffle material	10mm clear acrylic
Diaphragm material	NA
Material	Cold rolling steel with painting 1.5mm
Pass width	600-900mm
Baffle interception height	900mm
Height of baffle from ground	220mm
Movement	Standard quick-pass movement
Power supply	24V 150W
Input voltage	AC100V~240V,50/60HZ
Drive motor	Taibang DC brushless 30K 40W
Pass rate	Open 50 people/min; Usually closed 35 people/min
Speed of opening and closing	Adjustable from 0.5s to 1.5s
Sensor pairs	5 pairs
Clutch size	80mm outer diameter
Pilot lamp	RGB light strip
Communication mode	RS485
Controls	1v2 Standard brushless board + Box + network port board box
Noise	≤65dB
Temperature	-20℃~+70℃
Humidity	≤90% No condensation
Class of protection	IP4X
Environment	Indoor and outdoor (outdoor with canopy)

®**Turboo**

Case share

Turboo Automation Co.,Ltd

Scan our QR code to follow

Official Accounts