




G536-1 Product Show




Product model: G536-1

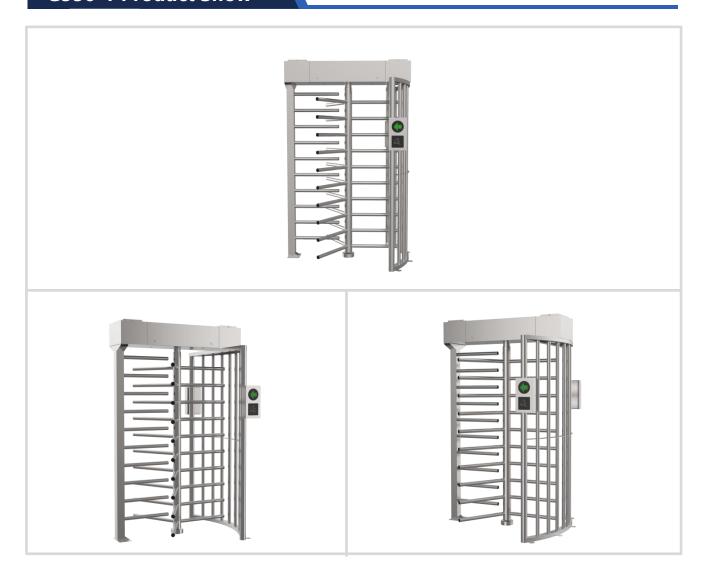

Functions & Features

- 1. Reasonable and reliable design, low noise, smooth operation and long service life;
- 2 With functions of anti-tail, anti-reverse pass and so on;
- 3. Card can be set "with memory" or "without memory" functions;
- 4. With automatic reset function, i.e. after having access to the gate, the gate automatically restores to the locked state if not pass within the time set;
- 5、With infrared anti-clip function (anti-clip when gate is open or running);
- 6. Compatible with IC, ID card, scanning and face recognition, etc.
- 7. Two modes of operation are available: open or closed.
- 8. Various working modes are available, including two-way card reading and one-way card reading, etc.

Size drawing

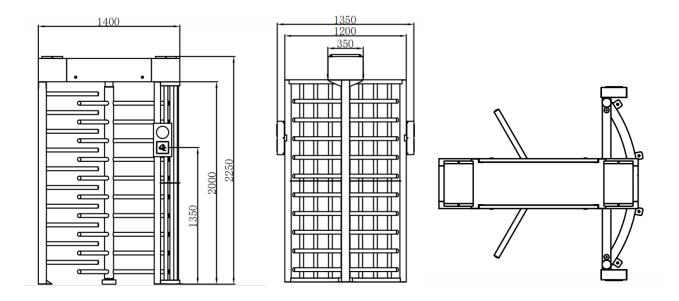

Product model: G536-1




Parame-

Size (L*W*H)	1400*1200*2250mm
Pass width	550mm
Power	50W
Material	Body δ =1.2mm / fence ϕ =1.0mm / Transmission Shaft ϕ =2.8mm SUS304
Movement	molding full-height turnstile movement
Sensor	Limited sensor
Indicator Light	Dynamic indicator light
Drive Unit	Anti burn solenoid
Power Supply	24V 150W
Control Unit	Main board
Communication Interface	Dry contact & RS485
Pass rate	35-50 persons/minute
Temperature	-20°C~+70°C
Humidity	≤90% No condensation
IP	IP4X
Environment	Indoor and outdoor

Product model: G536-1



Case share

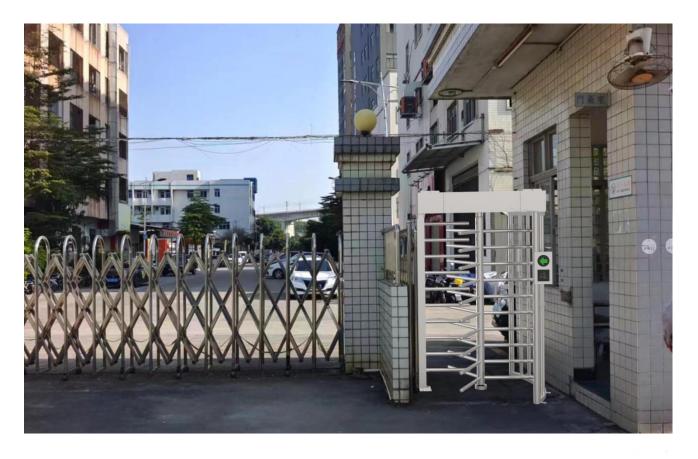

Turboo Automation Co., Ltd

Scan our GR

Code to follow

offcial accounts

Telephone: 86-0755-23305213; 86-0755-29809981;

Head Address: 1st-4th Floor,Building#1,Guanjie Factory area,guanguang Road #1134, Guihua Community,Guanlan Street,Longhua District,Shenzhen;

Production base: Factory Building No.1,Zhongzhi Science and Technology Park ,National High-tech Zone,Fuzhou City,Jiangxi;