




GM537-1 Product Show



Functions & Features

- 1、Reasonable and reliable design, low noise, smooth operation and long service life;
- 2、With functions of anti-tail, anti-reverse pass and so on;
- 3、Card can be set "with memory" or "without memory" functions;
- 4、With automatic reset function, i.e. after having access to the gate, the gate automatically restores to the locked state if not pass within the time set;
- 5、With infrared anti-clip function (anti-clip when gate is open or running);
- 6、Compatible with IC, ID card, scanning and face recognition,etc.
- 7、Two modes of operation are available: open or closed.
- 8、Various working modes are available, including two-way card reading and one-way card reading,etc.

Size drawing

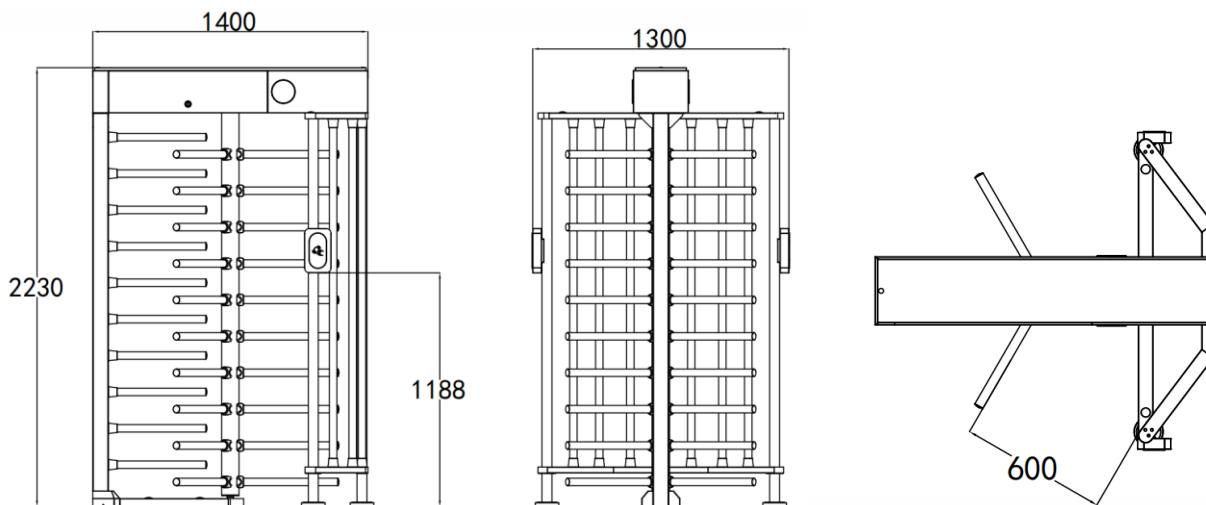

Parametric

Size (L*W*H)	1400*1300*2230mm
Pass width	600mm
Power	50W
Material	Body $\delta=1.2\text{mm}$ / fence $\phi=1.0\text{mm}$ SUS304
Movement	molding full-height turnstile movement
Sensor	Limited sensor
Indicator Light	Dynamic indicator light
Drive Unit	Anti burn solenoid
Power Supply	24V 150W
Control Unit	Main board
Communication Interface	Dry contact & RS485
Pass rate	35-50 persons/minute
Temperature	-20°C~+70°C
Humidity	$\leq 90\%$ No condensation
IP	IP4X
Environment	Indoor and outdoor

Case share



Turbo Automation Co., Ltd

**Scan our QR
code to follow**



official accounts



Telephone: 86-0755-23305213; 86-0755-29809981;

Head Address: 1st-4th Floor, Building #1, Guanjie Factory area, guanguang Road #1134, Guihua Community, Guanlan Street, Longhua District, Shenzhen;

Production base: Factory Building No.1, Zhongzhi Science and Technology Park, National High-tech Zone, Fuzhou City, Jiangxi;