



# LA3217 Product Show










# **Functions & Features**

- 1. Reasonable and reliable design, low noise, smooth operation and long service life;
- 2 With functions of anti-tail, anti-reverse pass and so on;
- 3. Card can be set "with memory" or "without memory" functions;
- 4. With automatic reset function, i.e. after having access to the gate, the gate automatically restores to the locked state if not pass within the time set;
- 5、With infrared anti-clip function (anti-clip when gate is open or running);
- 6. Compatible with IC, ID card, scanning and face recognition, etc.
- 7. Two modes of operation are available: open or closed.
- 8. Various working modes are available, including two-way card reading and one-way card reading,etc.

# **Size drawing**

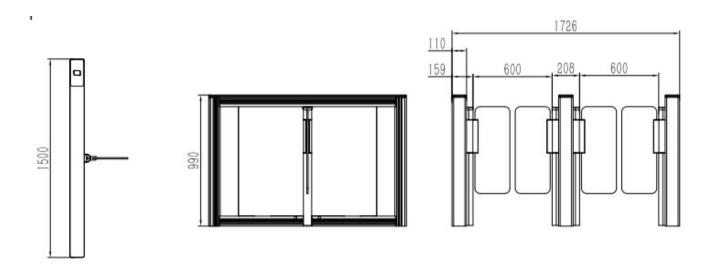



#### **Parameter**

**Size (L\*W\*H)** 1500\*110\*990mm

**Fuselage material** Top T=10mm+boby T=3.0mm aluminum alloy

Diaphragm material 8mm clear acrylic

Baffle material 10mm clear acrylic

Pass width 600-900mm

**Baffle interception height** 900mm

Height of baffle from ground 340mm

Movement Servo Speed Gate movement

Power supply 24V 500W

Input voltage AC100V~240V,50/60HZ

**Drive motor** Brushless servo motor

Pass rate Open 50 people/min; Usually closed 35 people/min

**Speed of opening and closing** Adjustable from 0.5s to 1.5s

Sensor pairs 8 pairs

Clutch size Ф=60mm

Pilot lamp RGB light strip

Communication mode RS485

**Controls** Servo control system

Noise ≤65dB

Temperature -20°C∼+70°C

**Humidity** ≤90% No condensation

IP IP4X

**Environment** Indoor and outdoor (outdoor with canopy)

**Product model: LA3217** 



# Case share





Telephone: 86-0755-23305213; 86-0755-29809981;

Head Address: 1st-4th Floor,Building#1,Guanjie Factory area,guanguang Road #1134, Guihua Community,Guanlan Street,Longhua District,Shenzhen;

Production base: Factory Building No.1,Zhongzhi Science and Technology Park ,National High-tech Zone,Fuzhou City,Jiangxi ;