



LA3218 Product Show




Product model: LA3218



Functions & Features

- 1. Reasonable and reliable design, low noise, smooth operation and long service life;
- 2. With function of opening doors automatically under power-off state to meet the need of fire-fighting passage;
- 3. With functions of anti-tail, anti-reverse pass and so on;
- 4. Card can be set "with memory" or "without memory" functions;
- 5. With automatic reset function, i.e. after having access to the gate, the gate automatically restores to the locked state if not pass within the time set;
- 6. With infrared anti-clip function (anti-clip when gate is open or running);
- 7、Compatible with IC, ID card, scanning and face recognition, etc.
- 8. Two modes of operation are available: open or closed.
- 9. Various working modes are available, including two-way card reading and one-way card reading, etc.

Size drawing

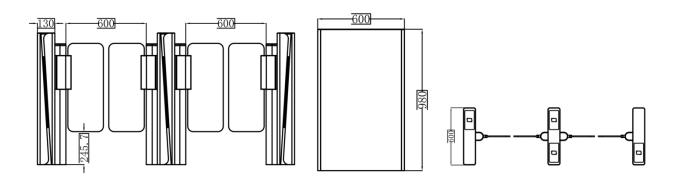



Da		
	ıra	Δ.

Size (L*W*H) 600*130*980mm

Material Top T=3.0mm/ body T=8.0mm

Arm Material 8mm clear acrylic

Pass width 600-900mm

Height From Ground (upper part) 900mm

Height From Ground (lower part) 245mm

Movement standard speed gate movement

Power supply 24V 500W

Input voltage AC100V~240V,50/60HZ

Drive Unit Brushless servo motor

Pass rate 35-50 persons/minute

Open Speed 0.5s/1.5s

Sensor 6 pairs

Clutch size ϕ =80mm

Pilot lamp RGB light

Communication mode RS485

Controls Main borad

Noise ≤65dB

Temperature -20°C∼+70°C

Humidity ≤90% No condensation

IP IP4X

Environment Indoor



Case share





Turboo Automation Co., Ltd

Scan our QR code to follow



official accounts



Head Address: 1st-4th Floor,Building#1,Guanjie Factory area,guanguang Road #1134, Guihua Community,Guanlan Street,Longhua District,Shenzhen;

Production base: Factory Building No.1,Zhongzhi Science and Technology Park ,National High-tech Zone,Fuzhou City,Jiangxi;