




## Package 10E

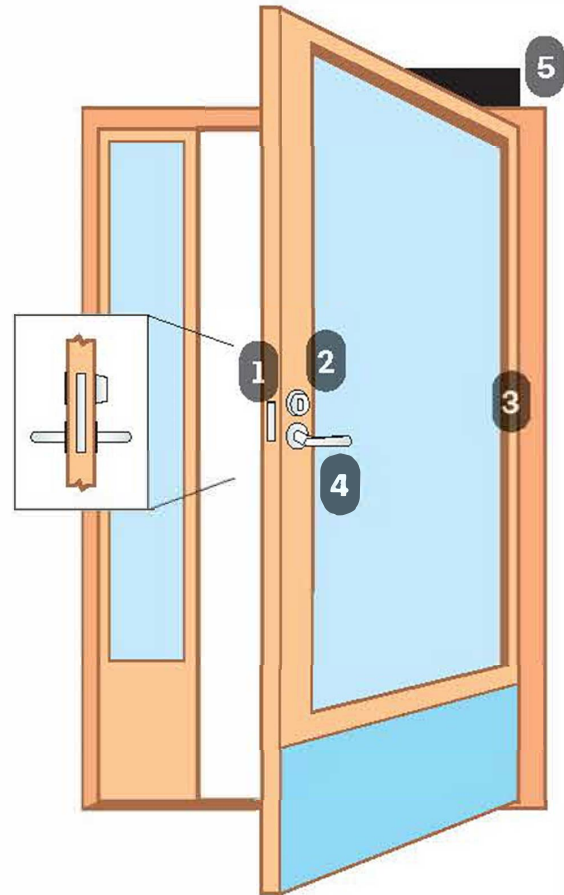

### Narrow stile door

### Read in, free egress – complies with EN179

1. EL480 solenoid lock
2. CY063 outside cylinder – Scandinavian
3. DL8 door loop
4. 3-20/O650 handle set
5. DC240 door closer (optional)

#### ORDERING CODES

ABLOY-EL480-29-PACK10E

ABLOY-EL480-35-PACK10E

Narrow stile door applications with handle operation. Inside handle always operates and outside handle is controlled and activated on signal from access control system. Key override at all times.

#### Technical Specification:

Operating voltage: 12 V<sub>dc</sub> to 24 V<sub>dc</sub> stabilised (+15%–10%).

Current draw: 12 V<sub>dc</sub> 350 mA max 24 V<sub>dc</sub> 250 mA max.

Backset available: Standard 29 mm, 35 mm.

Monitoring: RQE on inside handle, bolt position.

#### Standards:

EN179 when used with correct furniture

EN1634-1

EN61000-6-1

EN1303 (cylinder)

EN14846

