




Package 10P Escape (EN1125)

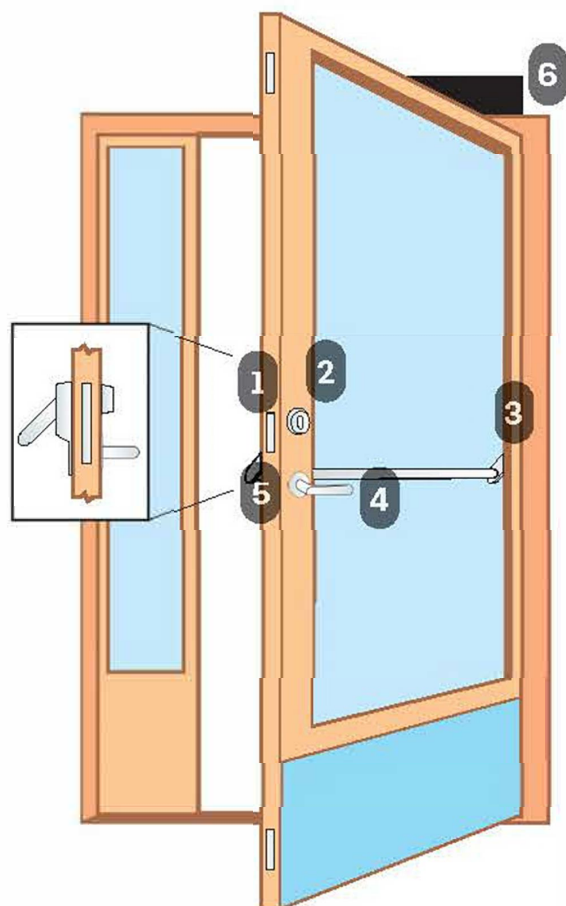

Narrow stile door

Read in, free egress – complies with EN1125

1. EL480 solenoid lock
2. CY063 outside cylinder – Scandinavian
3. DL8 door loop
4. PBE001 Abloy panic bar
5. 3-20/O651 outside handle
6. DC240 door closer (optional)

ORDERING CODES

ABLOY-EL480-29-PACK10P
ABLOY-EL480-35-PACK10E

Narrow stile door applications with handle operation. Inside handle always operates and outside handle is controlled and activated on signal from access control system. Key override at all times.

Technical Specification:

Operating voltage: 12 V DC to 24 V DC stabilised (+15%–10%).

Current draw: 12 V DC 350 mA max 24 V DC 250 mA max.

Backset available: Standard 29 mm, 35 mm.

Monitoring: RQE on panic bar, bolt position.

Standards:

EN1125 when used with correct furniture
EN1634-1
EN61000-6-1

EN1303 (cylinder)
EN14846

