




Package 11E High Security

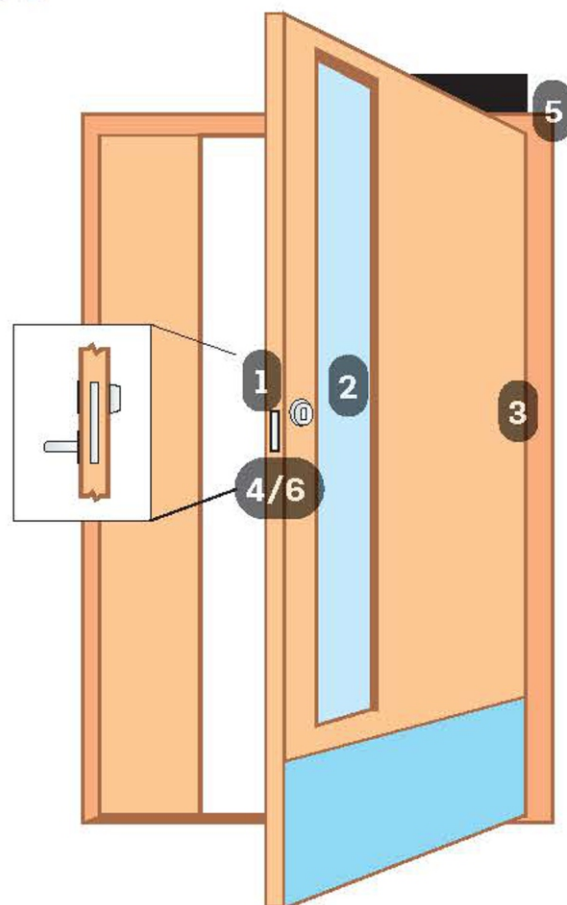

Standard door

Read in, free egress (motor lock) – complies with EN179

1. EL590 motor lock
2. CY037 outside cylinder – Scandinavian
3. EA280 concealed door loop
4. 3-20/O30 inside handle
5. DC240 door closer (optional)
6. 60-0219-PSS (alternative)

ORDERING CODE

ABLOY-EL590-50-PACK11E

High security wood or metal door applications with motor operated deadbolt and latch bolt, inside handle always operates. Key override at all times from outside. Optional electrical handle control: if used negates EN179.

Technical Specification:

Operating voltage: 12 V AC to 24 V DC stabilised (+15%–15%).

Current draw: 12 V DC 50 mA idle, norm 600 mA, max 1700 mA

24 V DC 23 mA idle, norm 250 mA, max 700 mA.

Backsets available: Standard 50 mm.

Monitoring: RQE on inside handle, bolt position, cyl. operation with additional part 950885.

Standards:

EN179 when used with correct furniture and functions

EN1634-1

EN61000-6-1

EN1303 (cylinder)
EN14846

