



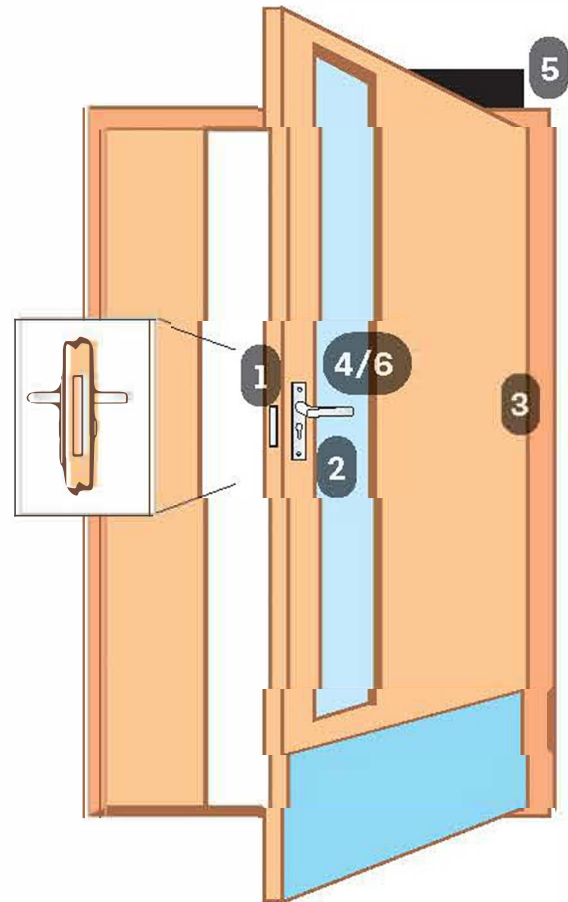

Package 1E

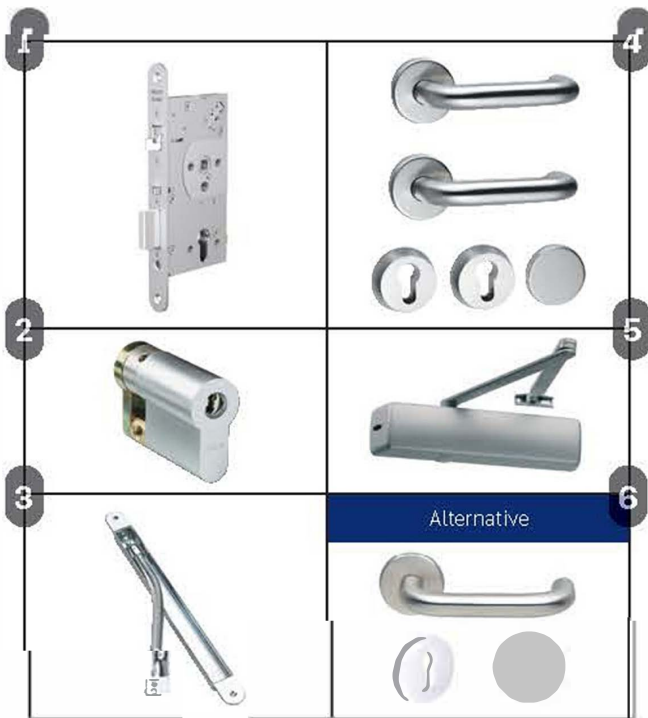

Standard door

Read in, free egress – complies with EN179

1. EL560 solenoid lock
2. CY326 single cylinder – DIN Europrofile
3. EA280 concealed door loop
4. 60-0319-SSS handle set
5. DC240 door closer (optional)
6. 3-19/042 PZ+BL-SSS alternative

Wood or metal door applications with handle operation, inside handle always operates and the outside handle is controlled and activated on signal from access control system. Key override at all times from outside.

Technical Specification:

Operating voltage: 12 V DC to 24 V DC stabilised (+15%–10%).

Current draw: 12 V DC 350 mA max 24 V DC 250 mA max.

Backsets available: Standard 65 mm, 55 mm, 60 mm, 80 mm, 100 mm.

Monitoring: RQE on inside handle, bolt position, door position, cylinder operation.

Standards:

EN179 when used with correct furniture

EN1634-1

EN61000-6-1

EN1303 (cylinder)

EN14846

ORDERING CODES

ABLOY-EL560-55-PACK1E

ABLOY-EL560-60-PACK1E

ABLOY-EL560-65-PACK1E

ABLOY-EL560-80-PACK1E

ABLOY-EL560-100-PACK1E

