



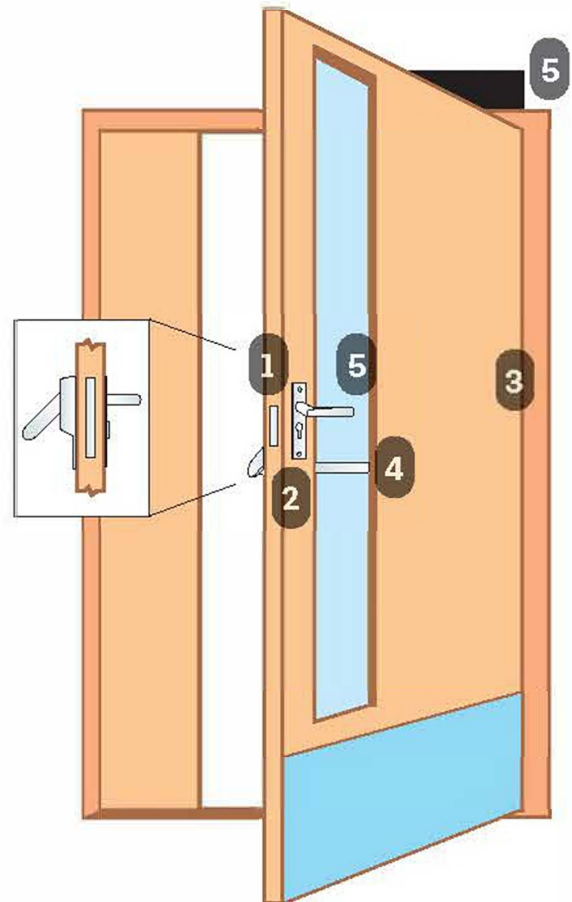

Package 1P Escape (EN1125)

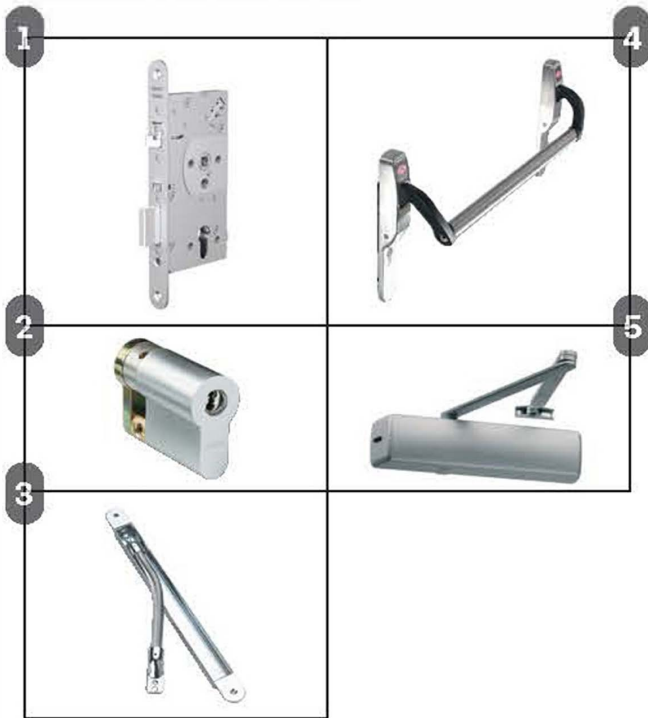

Standard door

Read in, free egress – complies with EN1125

1. EL560 solenoid lock
2. CY326 single cylinder – DIN Europrofile
3. EA280 concealed door loop
4. PBE011-EL560 ABLOY panic bar with 1/2 handle set
5. DC240 door closer (optional)

ORDERING CODES

ABLOY-EL560-55-PACK1P
 ABLOY-EL560-60-PACK1P
 ABLOY-EL560-65-PACK1P
 ABLOY-EL560-80-PACK1P
 ABLOY-EL560-100-PACK1P

Wood or metal door applications with handle operation, inside panic bar always operates and the outside handle is controlled and activated on signal from access control system. Key override at all times from outside.

Technical Specification:

Operating voltage: 12 V DC to 24 V DC stabilised (+15%–10%).

Current draw: 12 V DC 350 mA max 24 V DC 250 mA max.

Backsets available: Standard 65 mm, 55 mm, 60 mm, 80 mm, 100 mm.

Monitoring: RQE on panic bar, bolt position, door position, cylinder operation.

Standards:

EN1125 when used with correct furniture

EN1634-1

EN61000-6-1

EN1303 (cylinder)

EN14846

