


## Package 2M Multipoint

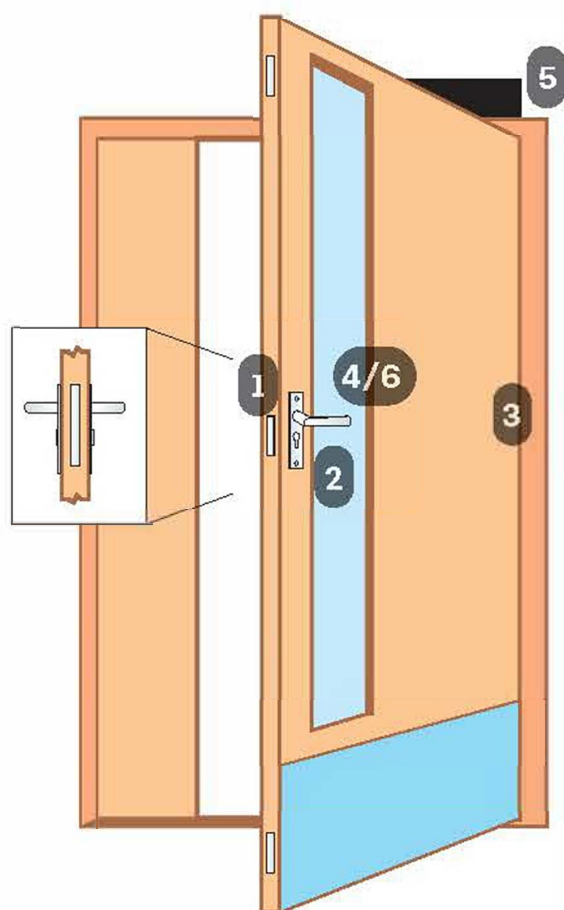

## Standard door Multipoint – Read in, read out

1. EL567 solenoid lock
2. CY327 double cylinder – DIN Europrofile
3. EA280 concealed door loop
4. 60-0319-SSS handle set
5. DC240 door closer (optional)
6. 3-19/042 PZ+PZ-SSS (alternative)

### ORDERING CODES

ABLOY-EL567-55-PACK2M

ABLOY-EL567-60-PACK2M

ABLOY-EL567-65-PACK2M

Wood or metal door applications with handle operation, both handles controlled and activated on signal from access control system. Key override at all times from both sides.

### Technical Specification:

Operating voltage: 12 V<sub>DC</sub> to 24 V<sub>DC</sub> stabilised (+15%–10%).

Current draw: 12 V<sub>DC</sub> 350 mA max 24 V<sub>DC</sub> 250 mA max.

Backsets available: Standard 65 mm, 55 mm, 60 mm.

Monitoring: RQE on inside handle, bolt position, door position, cylinder operation.

### Standards:

EN1634-1

EN61000-6-1

EN1303 (cylinder)

EN14846

