




## Package 3E

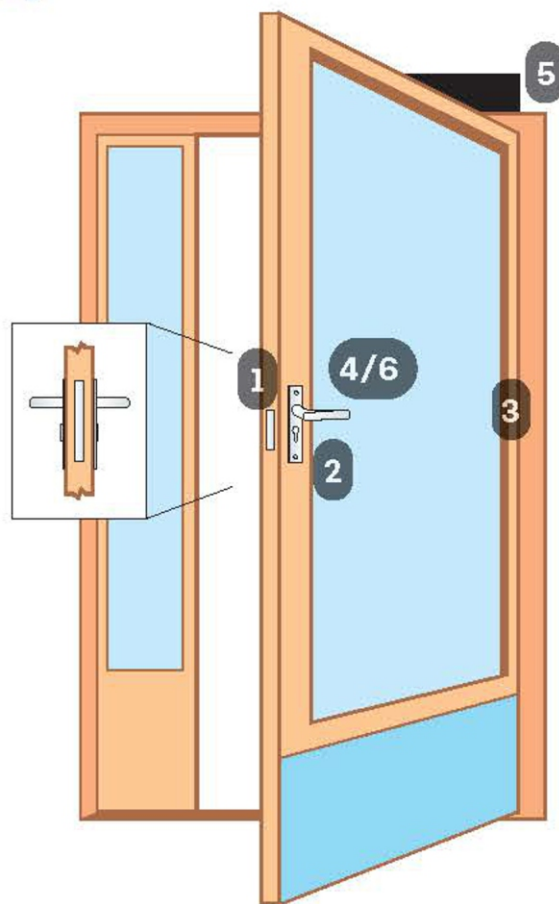

### Narrow stile door

### Read in, free egress – complies with EN179

1. EL460 solenoid lock
2. CY326 single cylinder – DIN Europrofile
3. DL8 door loop
4. 60-0819-SSS handle set to suite the EL460
5. DC240 door closer (optional)
6. 3192750/PZ+BL (alternative)

Narrow stile door applications with handle operation, inside handle always operates and the outside handle is controlled and activated on signal from access control system. Key override at all times from outside.

#### Technical Specification:

Operating voltage: 12 V<sub>DC</sub> to 24 V<sub>DC</sub> stabilised (+15%–10%).

Current draw: 12 V<sub>DC</sub> 350 mA max 24 V<sub>DC</sub> 250 mA max.

Backsets available: 30 mm, 35 mm, 40 mm, 45 mm.

Monitoring: RQE on inside handle, bolt position, door position, cylinder operation.

#### Standards:

EN179 when used with correct furniture

EN1634-1

EN61000-6-1

EN1303 (cylinder)

EN14846

#### ORDERING CODES

ABLOY-EL460-30-PACK3E

ABLOY-EL460-35-PACK3E

ABLOY-EL460-40-PACK3E

ABLOY-EL460-45-PACK3E

