




Package 3MP Escape (EN1125)

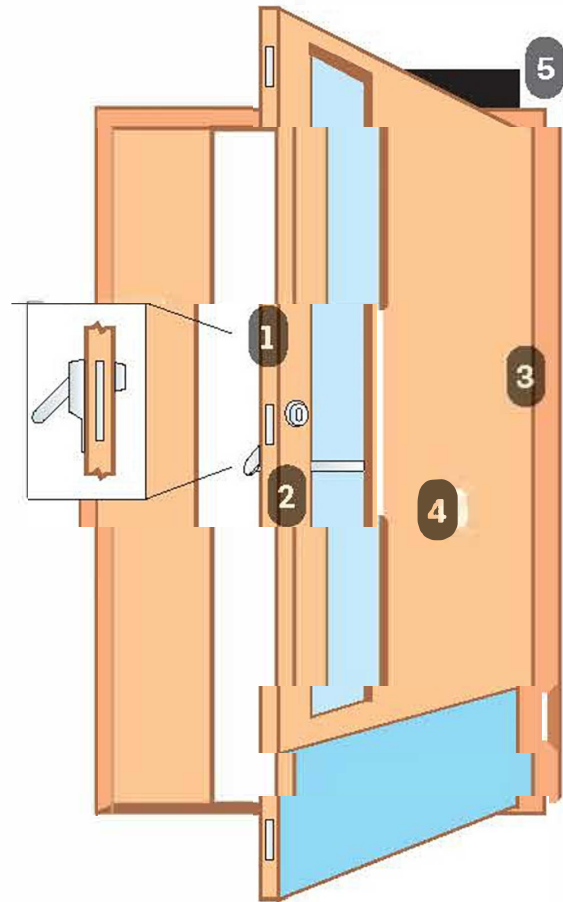

Narrow stile door

Multipoint – Read in, free egress – complies with EN1125

1. EL466 solenoid lock
2. CY326 single cylinder – DIN Europrofile
3. DL8 door loop
4. PBE011-EL460 ABLOY panic bar with 1/2 handle set
5. DC240 door closer (optional)

ORDERING CODES

ABLOY-EL466-30-PACK3MP
ABLOY-EL466-35-PACK3MP
ABLOY-EL466-40-PACK3MP
ABLOY-EL466-45-PACK3MP

Narrow stile door applications with handle operation, inside panic bar always operates and the outside handle is controlled and activated on signal from access control system. Key override at all times from outside.

Technical Specification:

Operating voltage: 12 V DC to 24 V DC stabilised (+15%–10%).

Current draw: 12 V DC 350 mA max 24 V DC 250 mA max.

Backsets available: 30 mm, 35 mm, 40 mm, 45 mm.

Monitoring: RQE on panic bar, bolt position, door position, cylinder operation.

Standards:

EN1125 when used with correct furniture

EN1634-1

EN61000-6-1

EN1303 (cylinder)

EN14846

