


Package 5ME Multipoint - High Security

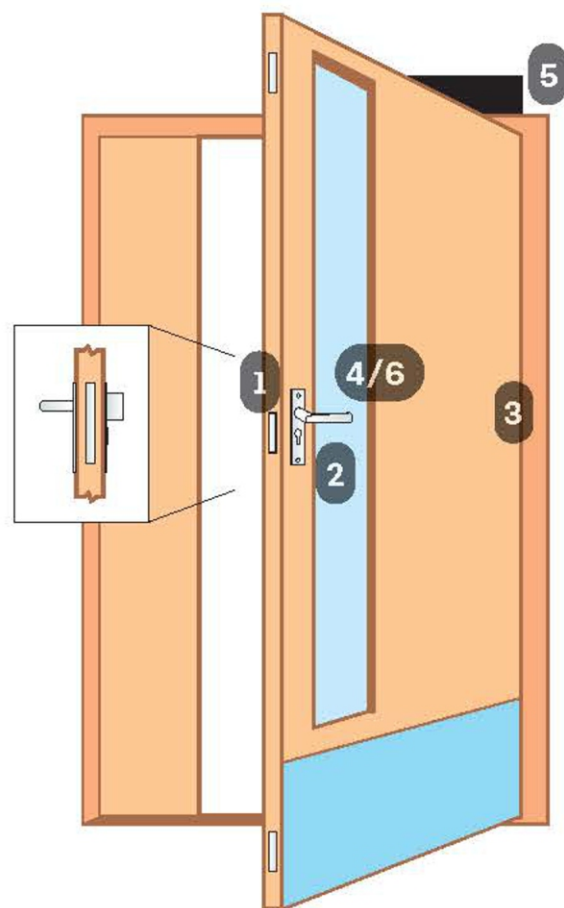

Standard door Read in, free egress (motor lock) - complies with EN179

1. MP520 motor lock
2. CY326 single cylinder - DIN Europrofile
3. EA280 concealed door loop
4. 60-0119-SSS lever handle set
5. DC240 door closer (optional)
6. 319242/115PZ+BL (alternative)

ORDERING CODES

ABLOY-MP520-55-PACK5ME
ABLOY-MP520-60-PACK5ME
ABLOY-MP520-65-PACK5ME

High security wood or metal door applications with motor operated deadbolt, hook bolts and latch bolt, inside handle always operates. Key override at all times from outside.

Technical Specification:

Operating voltage: 12 V AC to 18 V AC, 12 V DC to 24 V DC (+15%–10%).

Current draw: 12 V DC 80 mA idle, norm 450 mA 24 V DC 40 mA idle, norm 220 mA.

Backsets available: Standard 65 mm, 55 mm, 60 mm.

Monitoring: RQE on inside handle, bolt position, door position, cylinder operation.

Standards:

EN179 when used with correct furniture

EN14846

EN1634-1

EN61000-6-1

EN1303 (cylinder)

