



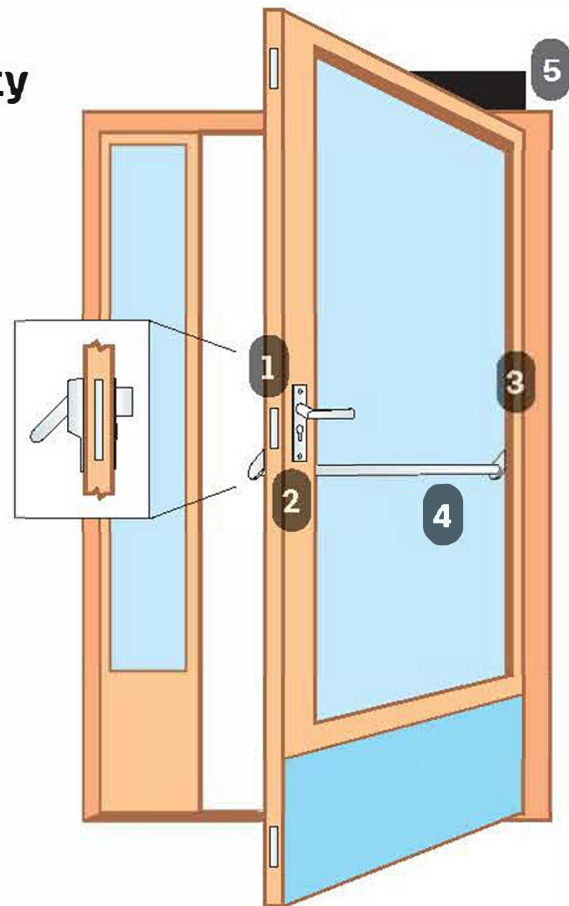

Package 6MP Multipoint – Escape – High Security

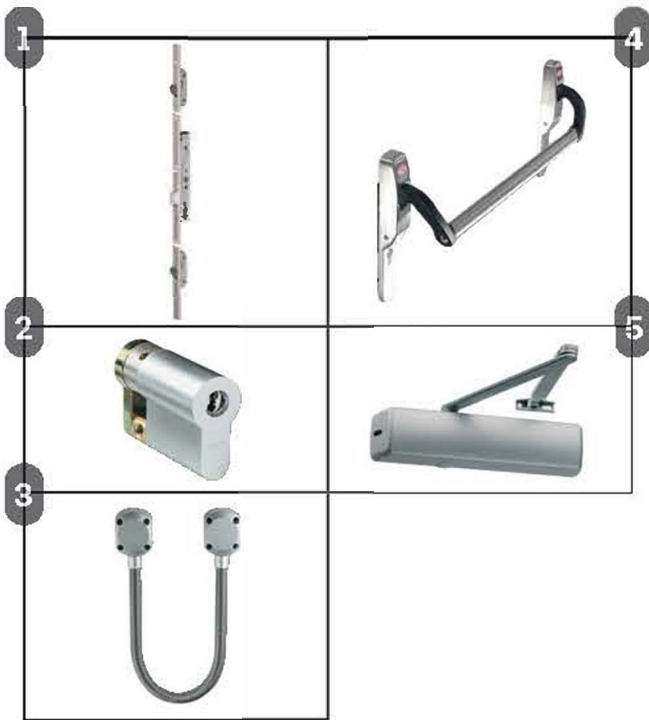

Narrow stile door

Read in, free egress (motor lock) – complies with EN1125

1. MP420 motor lock
2. CY326 single cylinder – DIN Europrofile
3. DL8 door loop
4. PBE011-EL420 ABLOY panic bar with cylinder escutcheon
5. DC240 door closer (optional)

ORDERING CODES

ABLOY-MP420-30-PACK6MP
ABLOY-MP420-35-PACK6MP
ABLOY-MP420-40-PACK6MP
ABLOY-MP420-45-PACK6MP

High security narrow stile door applications with motor operated deadbolt, hook bolts and latch bolt, inside panic bar always operates. Key override at all times from outside.

Technical Specification:

Operating voltage: 12 V AC to 18 V AC, 12 V DC to 24 V DC (+15%–10%).

Current draw: 12 V DC 80 mA idle, norm 450 mA, max 1300 mA

24 V DC 40 mA idle, norm 220 mA, max 600 mA.

Backsets available: 30 mm, 35 mm, 40 mm, 45 mm.

Monitoring: RQE on panic bar, bolt position, door position, cylinder operation.

Standards:

EN1125 when used with correct furniture

EN1634-1

EN61000-6-1

EN1303 (cylinder)

EN14846

