




Package 7E

Not suitable for Fire Rated doors

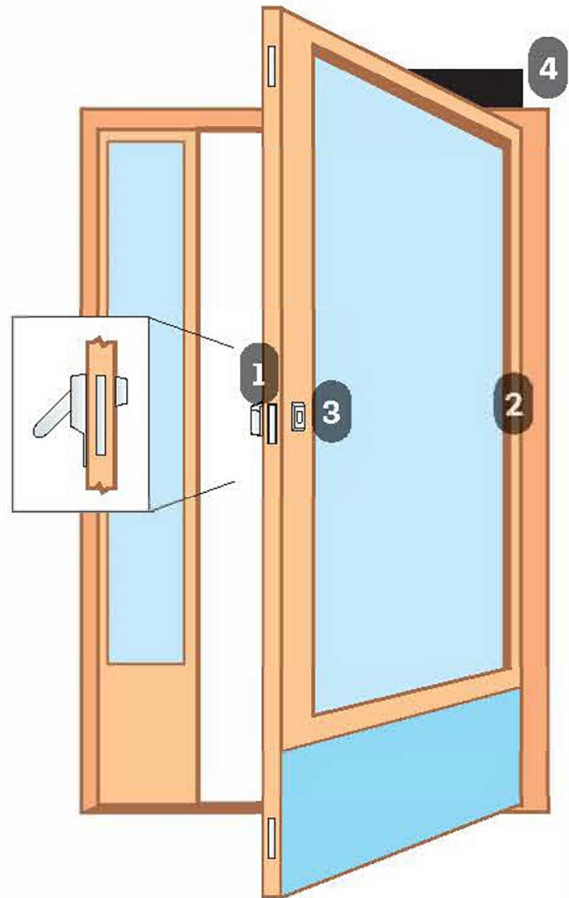

Narrow stile door

Read in, free egress – complies with EN179

1. EL402 F/UN solenoid lock, fail unlocked
2. DL8 door loop
3. CY080 Scandinavian cylinder/push pad
4. DC240 door closer (optional)

ORDERING CODE

ABLOY-EL402 F/UN-25-PACK7E
 ABLOY-EL402 F/UN-28-PACK7E
 ABLOY-EL402 F/UN-30-PACK7E
 ABLOY-EL402 F/UN-35-PACK7E

Narrow stile door applications with push pad operation and activated on signal from access control system. Key override at all times on outside, push pad always operational from inside.

For use on aluminium doors; compliant with BS EN179 for emergency escape but not suitable for fire rated doors as they have not been fire tested.

Technical Specification:

Operating voltage: 12 V_{DC} or 24 V_{DC} stabilised (+15%–10%).

Current draw: 12 V_{DC} 480 mA max 24 V_{DC} 240 mA max.

Backsets available: Adjustable from 25 mm, 28 mm, 30 mm, 35 mm or 35 mm.

Monitoring: Bolt position.

Standards:

EN179 when used with correct furniture

EN61000-6-1

EN1303 (cylinder)

