




## Package 8E

Not suitable for Fire Rated doors

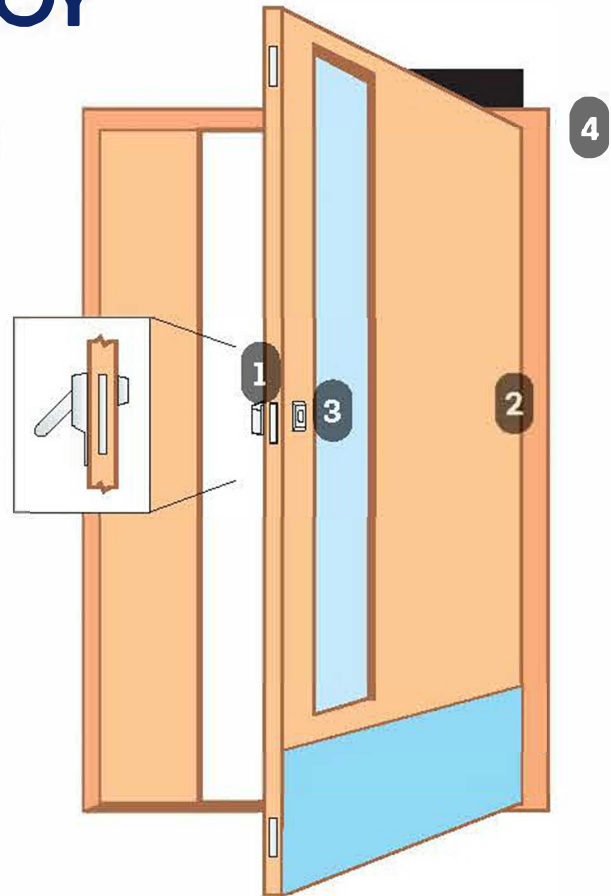

## Standard door

Read in, free egress – complies with EN179

1. EL502 F/UN solenoid lock, fail unlocked
2. EA280 concealed door loop
3. CY077-PT-PC-DF Scandinavian cylinder/push pad
4. DC240 door closer (optional)

### ORDERING CODE

ABLOY-EL502 F/UN-50-PACK8E

Wood or metal door applications with push pad operation and activated on signal from access control system. Key override at all times on outside, push pad always operational from inside.

For use on aluminium doors; compliant with BS EN179 for emergency escape but not suitable for fire rated doors as they have not been fire tested.

### Technical Specification:

Operating voltage: 12 V DC or 24 V DC stabilised (+15%–10%).

Current draw: 12 V DC 480 mA max 24 V DC 240 mA max.

Backset available: 50 mm.

Monitoring: Bolt position.

### Standards:

EN179 when used with correct furniture

EN61000-6-1

EN1303 (cylinder)

