




Package 9E

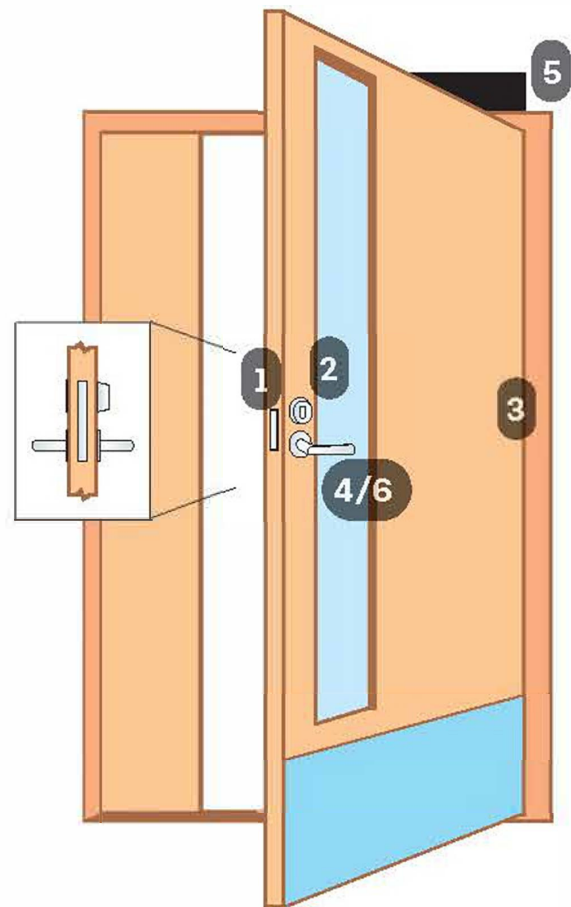

Standard door

Read in, free egress – complies with EN179

1. EL580 solenoid lock
2. CY037 outside cylinder – Scandinavian
3. EA280 concealed door loop
4. 3-20/O32 handle set
5. DC240 door closer (optional)
6. 60-0619-PSS (alternative)

ORDERING CODES

ABLOY-EL580-50-PACK9E

ABLOY-EL580-70-PACK9E

Wood or metal door applications with handle operation. Inside handle always operates and outside handle is controlled and activated on signal from access control system. Key override at all times.

Technical Specification:

Operating voltage: 12 V dc to 24 V dc stabilised (+15%–10%).

Current draw: 12 V dc 350 mA max 24 V dc 250 mA max.

Backset available: Standard 50 mm, 70 mm.

Monitoring: RQE on inside handle, bolt position.

Standards:

EN179 when used with correct furniture

EN1634-1

EN61000-6-1

EN1303 (cylinder)

EN14846

