



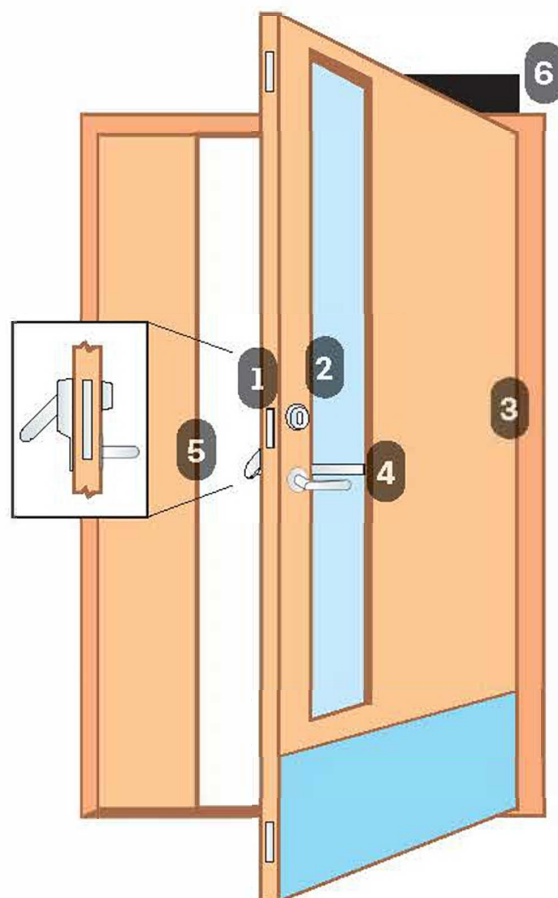

## Package 9P Escape (EN1125)

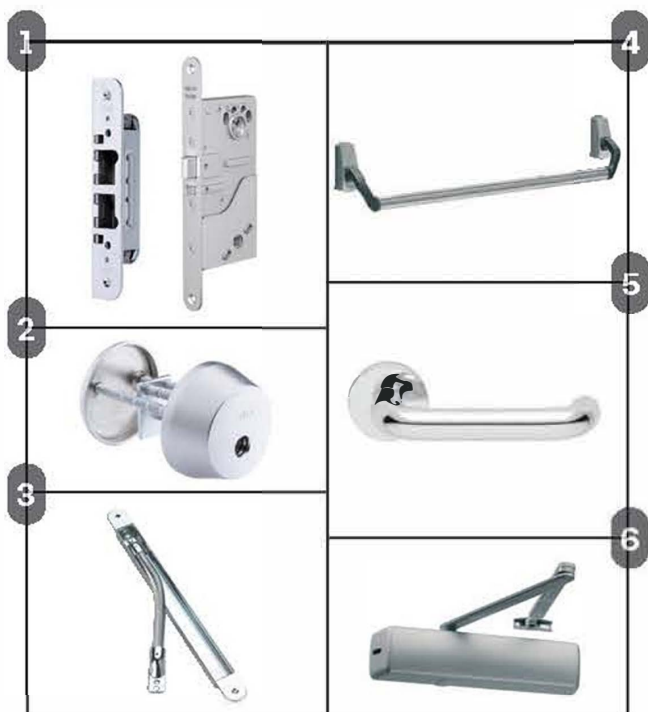

### Standard door

### Read in, free egress - complies with EN1125

1. PE580 solenoid lock with LP712 strike
2. CY037 outside cylinder - Scandinavian
3. EA280 concealed door loop
4. PBE001 Abloy panic bar
5. 3-20/O321 outside handle
6. DC240 door closer (optional)

### ORDERING CODE

ABLOY-PE580-50-PACK9P

Wood or metal door applications with handle operation. Inside panic bar always operates and outside handle is controlled and activated on signal from access control system. Key override at all times.

### Technical Specification:

Operating voltage: 12 V DC to 24 V DC stabilised (+15%-10%).

Current draw: 12 V DC 350 mA max 24 V DC 250 mA max.

Backset available: 50 mm.

Monitoring: RQE on panic bar, bolt position.

### Standards:

EN1125 when used with correct furniture

EN1634-1

EN61000-6-1

EN1303 (cylinder)

EN14846

