



# A-10060-BLK

## Unmonitored Double Standard Magnet in Black

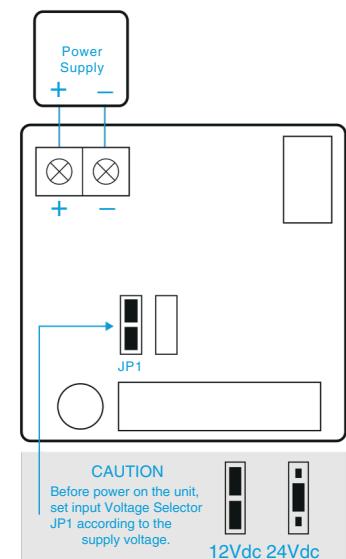

- Operating voltage 12~24Vdc (Selectable)
- Aluminium housing
- Holding force up to 2 x 1200lbs (544Kg)
- Electro-less nickel plated armature
- Architectural Black Finish

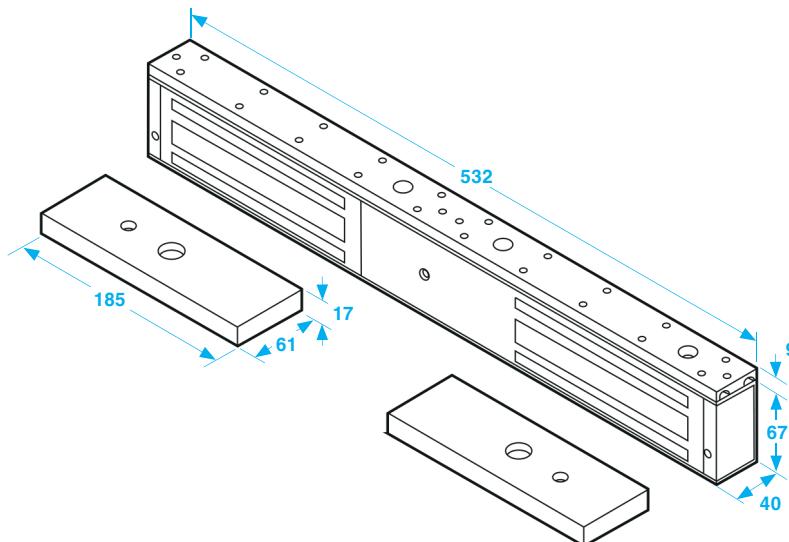

### SPECIFICATION

- Voltage tolerance:  $\pm 10\%$ .
- Current draw: 420mA at 12Vdc, 210mA at 24Vdc (at temperature  $20^\circ\text{C}$ ).
- Operating temperature:  $-10\text{--}55^\circ\text{C}$  ( $14\text{ to }131^\circ\text{F}$ ).
- Lock's surface temperature: Current temperature  $\pm 20\%$  (when power is on).
- Humidity: 0~95% non-condensing.
- Aluminium housing, nickel plated armature.
- Weight: 9.3kg (approx).